
LED Wash Zoom 36x12W RGBW Moving Head Lighting



Maintenance

1. Please keep the light in dryness and avoiding use in wet place.
2. Using intermittently can be extended the life.
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better.
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product.

Statement


The product has well capability and intact packing when leave factory, All of the user should comply with above warning item and manual ,any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual. Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and not use it the place over 40 degree.
2. Please don't lay the product on the un-fixable or shakable place.
3. Ask for the professional to maintain the product in order to avoid the danger of get an electric shock.
4. Power supply should not be changed over +&-10% while the light is using, it will be decreased the life of lamp if the power is too high, but it will be influenced the luminosity if the power is too low.
5. After power off, if it is need used again, please cool down over 20 minuter.
6. Please look round the manual for ensure the product can be used normally.

Display Control Instruction

Welcome to use our light. The light uses energy-saving LED, long Product life, shockproof, dustproof, DMX receiver and self-running feature, which can produce a variety of vivid lighting effects, easy to operate, suitable for all types of entertainment decoration, architectural lighting industry.

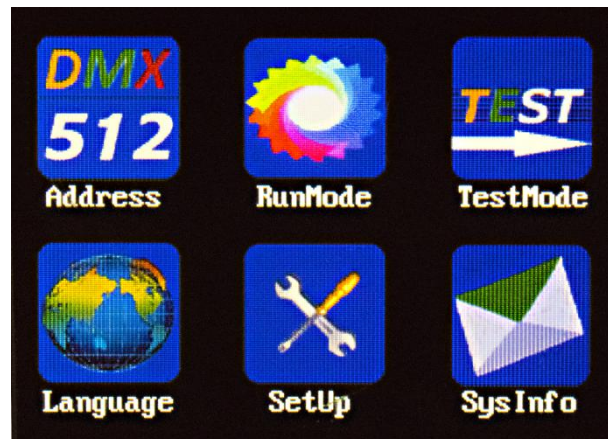

Product Introduction

- * Power Supply: AC90--275V, 50--60HZ
- * Power consumption 432W
- * Fixing lamp: LED 36×12W RGBW
- * DMX-Control-channels: 12/16 DMX Channels
- * Shuttle: Flash rate: 0--10HZ
- * Dimmer: 0-100% mechanic dimmer
- * Long Lifespan LEDs (more than 60,000 hours)

DMX Channel Summary-12 Channels Mode		
Channel	Value	Function
CH1	0-255	Total Dimmer
CH2	0-255	Red Dimmer
CH3	0-255	Green Dimmer
CH4	0-255	Blue Dimmer
CH5	0-255	White Dimmer
CH6	0-255	RGBW Dimming Half
CH7	0-255	X- axis Rotates
CH8	0-255	Y- axis Rotates
CH9	0-255	X/Y- axis,Speed Control
CH10	0-255	Zoom
CH11	0-255	Strobe
CH12	0-255	Blank(spare)

DMX Channel Summary-16 Channels Mode		
Channel	Value	Function
CH1	0-255	Total Dimmer
CH2	0-255	Red Dimmer
CH3	0-255	Green Dimmer
CH4	0-255	Blue Dimmer
CH5	0-255	White Dimmer
CH6	0-255	RGBW on light
CH7	0-255	X- axis Rotates
CH8	0-255	Y- axis Rotates
CH9	0-255	Pan Fine
CH10	0-255	Tilt Fine
CH11	0-255	X/Y-axis,Speed Control
CH12	0-255	Zoom
CH13	0-255	Strobe
CH14	51-90	Manual control of color by CH15
	91-130	Color fade change
	131-170	Color jump change
		Speed adjusting by CH15

	171-210	Color gradient change	
	211-255	Built-in action	
CH15	0-255	Speed Control-Auto Mode	
CH16	250-255	Blank(spare)	

Display Control Instruction		
Address	0-512	Address code adjustment
RunMode	DMX	12/16 channel selection
	Auto	Automatic mode 1-8
	Sound	Receive external sounds or vibrations, run built-in program effects
	Return	return
TestMode	Pan	X-axis motor adjustment
	Tilt	Y-axis motor regulation
	Focus	Focusing motor adjustment
	Red	Red Dimmer
	Green	Green Dimmer
	Blue	Blue Dimmer
	White	White Dimmer
	Return	return
Language	中文	Chinese
	English	English
	Return	return
Setup	IdCode	ID code adjustment
	PanReverse	on off
	TiltReverse	on off
	FaderDelay	on off
	SignalLink	on off
	CodeWheel	on off
	TempSwitchSet	on off
	TemperatureSet	50-120
	ScreenSaver	Mode 1, Mode 2, Off
	DisplayReverse	on off
	FactorySet	Factory settings
	RESET	Motor reset
	TouchCorrect	TouchCorrect
	PanOffset	0-255
TiltOffset	0-255	

	Return	return
SysInfo	**	**