


30w SPOT MOVING HEAD LIGHT

USER MANUAL

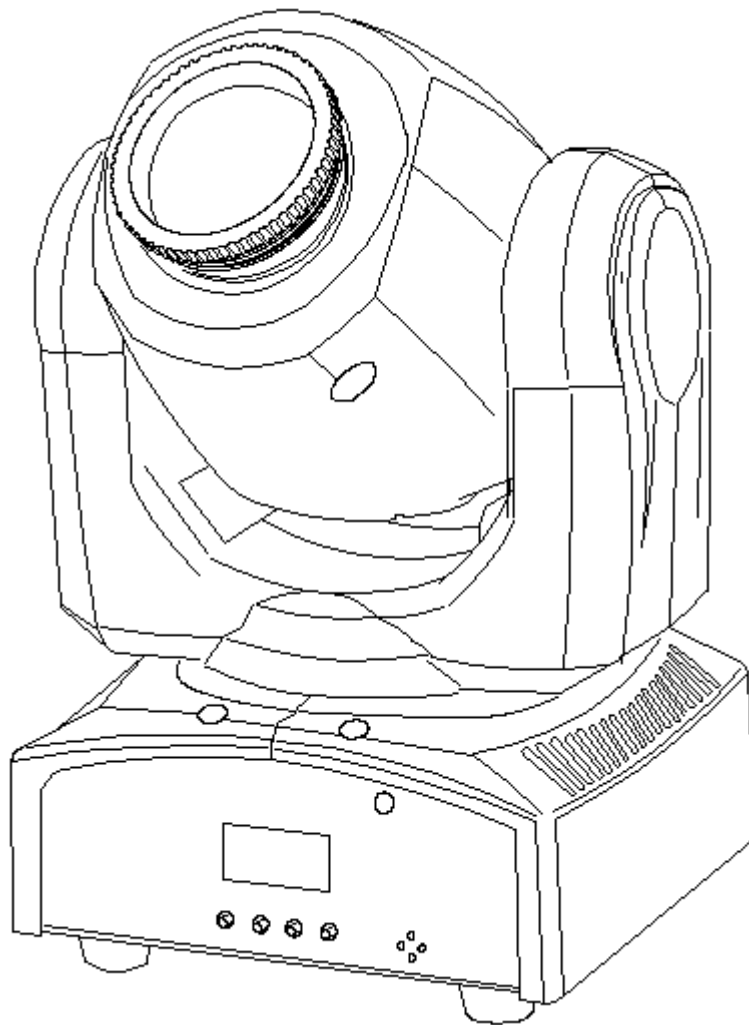

Please read the product carefully before use

Maintaining

1. the Lamps and lanterns should be kept dry, avoid working in moist environment
2. Indirect use will extend the service life of the lamp effectively
3. To obtain the better effect of ventilation and lighting, it is need to pay attention to the regular cleaning of fan and lens
4. Do not use organic solvents to clean the lamp shell, so as not to cause damage

Statement

This product performance in good condition, completely packed, working properly before it is sold. All users should strictly comply with the above stated warnings and instructions. Any damaged caused by human error are not within the company's warranty. Faults and problems which caused from neglect the operation manual is not in the Distributor responsible for range.

This manual for technical are subject to change without further notice

Caveats

1. In order to ensure the service life of the products, the products should not put on a wet or Water Leakage place, nor in the temperature more than 40 Deg place to work
2. Do not place this product where easily loose or vibration.
3. In order to avoid the risk of electricity, for maintenance please ask professional personnel for help
4. The power supply voltage change should not be more than 10% when Light bulb work , high voltage will shorten the service life of the bulb, low voltage can lower the smooth effect.
5. Lamps and lanterns need sufficient cooling when the power is energized again after use.
6. In order to guarantee the normal use of this product, please read the instructions carefully.

introduction to products

parameter

Operating Voltage :AC100V-240v 50/60Hz

Power consumption:50W

Light source:zhenli 30W white light

Channel signal:DMX512 port, 8 and 11 channels

Color wheel:7 color + white light, and a half color

Pattern wheel:7 pattern+ white circle, and the rainbow effect

Strobe: 0-10 Times/Second, adjustable

Dimming: 0%-100% linearly tunable

X-axis:540° 16Bit adjustable

Y-axis:270° 16Bit adjustable

Special function:The program built in a variety of lighting effects, can separate from the console operation.

Optical system:High precision quartz lens combination, make the light loss to the minimum.

Protection:intelligent temperature overheating protection and anti-interference electronic circuit.

11 channel control instructions

Our company's products receive international standard DMX512 signal, the detailed content of control are as follows

Channel	DMX Value	Control contents
1	Linear 0-255	X-AXIS
2	Linear 0-255	X-fine-tuning
3	Linear 0-255	Y-AXIS
4	Linear 0-255	Y fine-tuning
5	Linear 0-255	Speed control X.Y
6	Linear 0-255	Color wheel and half color
7	Linear 0-255	Pattern plate and bounce
8	Linear 0-255	strobe
9	Linear 0-255	Light bulb
10	Linear 0-255	Built-in from the program
11	255	Controller reset

8 channel control instructions

1	Linear 0-255	X-AXIS
2	Linear 0-255	Y-AXIS
3	Linear 0-255	Color wheel and half color
4	Linear 0-255	Pattern plate and bounce
5	Linear 0-255	strobe

6	Linear 0-255	Light bulb
7	Linear 0-255	Speed control X.Y
8		Sound1 and sound 2
9	255	reset

Display control instructions

Press the MODE/ESC key to enter the menu settings and Press the ENTER key to enter the menu sub menu, press the UP or DOWN key to choose sub-menu items, press the ENTER key to confirm the normal work, the objective function that is as follows

