


PRn	→	PRn	Horizontal rotation mode X Positive rotation
	→	PRRn	Horizontal rotation mode X Reverse rotation
Yn	→	Yn	Vertical rotation mode Y Positive rotation
	→	PRYn	Vertical rotation mode Y Reverse rotation
d.S	→	d.S	Display mode: Positive display
	→	PRd.S	Display mode: Reverse display
PR54	→	PR54	Vertical rotating 54°
	→	PR36	Vertical rotating 36°
	→	PR18	Vertical rotating 18°
E.27	→	E.27	Horizontal rotating 270°
	→	E.18	Horizontal rotating 180°
	→	E.9	Horizontal rotating 90°
RES			System reset
LoR			Initialization

LED MOVING HEAD 7x12W

User's Manual

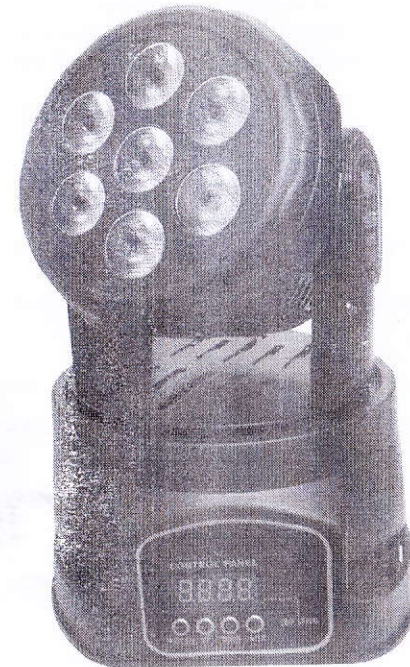

Please read the product carefully before use

Maintenance

1. Please keep the light in dryness and avoiding use in wet place
2. Using intermittently can be extended the life
3. Attention to clean the fan and lens usually in order to get the ventilating effects and lighting effects better
4. Please do not wipe the crust using organic menstruum for avoid to damaged the product

Statement

The product has well capability and infact packing when leave factory. All of the user should comply with above warning item and manual, any misuse cause of the damages are not included in our guarantee, and also can't be responsible for any malfunction & problem owing to ignore the manual.

Please forgive that we will not be notice for technical change

Attention Item

1. For guarantee the life of product, please do not put it on the wet place and do not use when above 40 degree.
2. Please don't lay the product on un-fixable or shakable plate.
3. Ask for the professional to maintain the product to avoid anydanger of get an electric shock.
4. Power supply should not be changed over $\pm 10\%$ while the light is using, it will decrease the life of lamp if the power is too high, but it will influence the lumen index if the power is too low.
5. After power off ,if it is need used again, please cool down for over 20minutes.
6. Please look round the manual to ensure the product can be used normally.

Product Introduction

- Power supply AC90-240V,50Hz-60Hz
- Power consumption:84W
- Fixing lamp:7X12W RGBW LED
- DMX-Control-channels: 14channels
- Color:RGBW color-mixture
- Shuttle:Flash rate:0-10Hz
- Dimmer:0-100%mechanic dimmer
- Maximum PAN-movement:540°

- Maximum TILT movement: 180°
- Run mode:DMX512.master-slave.auto acoustic control

DMX Channel 14 Channels Mode

Channel	Channel Value	Function
1	0-255	Horizontal
2	0-255	Horizontal adjustment
3	0-255	Vertical
4	0-255	Vertical adjustment
5	0-255	Motor speed
6	0-255	Dimming Light
7	0-255	Strobe speed
8	0-15	No fuction
	16-255	Color jump
9	0-255	Color jump speed
10	0-255	Red light
11	0-255	Green light
12	0-255	Blue light
13	0-255	White light
14	0-128	No fuction
	128-255	Reset

Display Control Instruction

