


MiNi 3*3 LED Spider Light

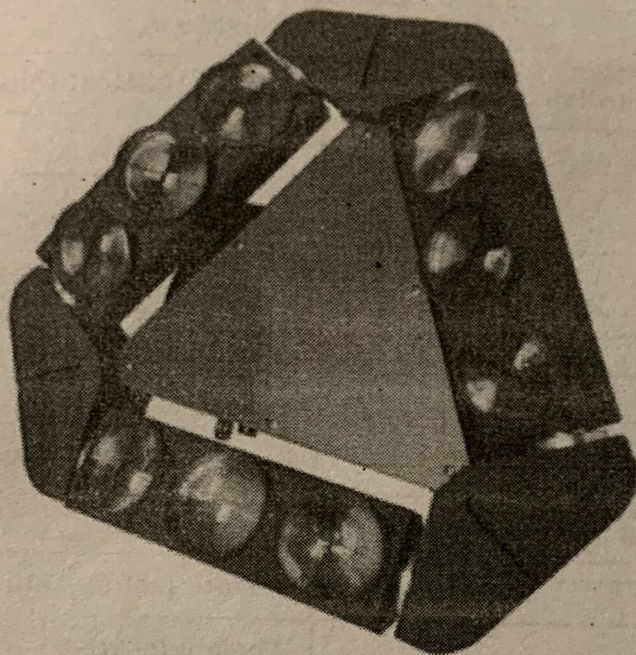

Pls read it carefully before use it

Importer name: FISHING KING, SLU

Importer address: PIEDRABUENA, 4, 4B, MADRID, MADRID, 28026 Spain

Manufacturer name: Shenzhen TOMTOP Technology Co., Ltd.

Manufacturer address: G-4 Zone 5/F, No.1 Exchange Square, Huanan City, Pinghu Town, Longgang District, Shenzhen, Guangdong, China

Menu Functions:

Address	A001---A512	Addressing code
Chnd	12CH, 19CH	Channel option
Mode	SOUND AUTO	Effect options
SLnd	MASTER, SLAVE	Master/Slave option
Blac	YES, NO	Standby Mode
Soud	ON, OFF	Sound Switch
Soen	Sound sensitivity control	0 OFF, 100Most sensitive
Pan	YES, NO	Level reverse
Tilt1	YES, NO	Vertical reverse
Tilt2	YES, NO	Vertical reverse
Tilt3	YES, NO	Vertical reverse
DISP	YES, NO	
LED	ON, OFF	Background Light Switch
Test	Auto testing	
Defaults	YES, NO	Restore factory setting
Rest	YES, NO	Whole light reset

12 Channel Functions:

CH1	X-axis motor CH	0---127	0° -----360° locate
		128---191	Clockwise Slow to Fast
		192---255	Anticlockwise Slow to Fast
CH2	Y-axis 1CH	0---255	0° -----185°
CH3	Y-axis 2 CH	0---255	0° -----185°
CH4	Y-axis 3 CH	0---255	0° -----185°
CH5	Sum Dimming	0---255	0-----100%
CH6	Strobe	0---9	No strobe
		10-255	Strobe speed Slow to Fast
CH7	R Dimming	0---255	0----100%
CH8	G Dimming	0---255	0----100%
CH9	B Dimming	0---255	0----100%

CH10	Effect	0-7	No effect
		8----23	Effect 1
		24----39	Effect 2
		40----55	Effect 3
		56---71	Effect 4
		72----87	Effect 5
		88----103	Effect 6
		104----119	Effect 7
		120----135	Effect 8
		136---151	Effect 9
		152----167	Effect 10
		168---183	Effect 11
		184----199	Effect 12
		200----215	Effect 13
		216---231	Effect 14
232----255	Effect 15		
CH11	Effect speed	0---255	From fast to slow
CH12	Reset	241----250	Reset after 5s

19 CH Functions:

CH1	X-axis motor CH	0---255	0° -----360° Locate
CH2	X-axis 360° rotation	0---15	No function
		128---191	Clockwise Slow to Fast
		192---255	Anticlockwise Slow to Fast
CH3	Y-axis motor 1CH	0---255	0° -----185°
CH4	Y-axis motor 2 CH	0---255	0° -----185°
CH5	Y-axis motor 3 CH	0---255	0° -----185°
CH6	Sum Dimming	0---255	0-----100%
CH7	Strobe	0---9	No strobe
		10-255	Strobe speed slow to fast
CH8	R1 Dimming	0---255	0----100%
CH9	G1 Dimming	0---255	0----100%

MiNi 3*3 LED Spider Light



CH10	B1 Dimming	0---255	0----100%
CH11	R2 Dimming	0---255	0----100%
CH12	G2 Dimming	0---255	0----100%
CH13	B2 Dimming	0---255	0----100%
CH14	R3 Dimming	0---255	0----100%
CH15	G3 Dimming	0---255	0----100%
CH16	B3 Dimming	0---255	0----100%
CH17	Effect	0-7	No e Effect
		8----23	Effect 1
		24----39	Effect 2
		40----55	Effect 3
		56---71	Effect 4
		72----87	Effect 5
		88----103	Effect 6
		104----119	Effect 7
		120----135	Effect 8
		136---151	Effect 9
		152----167	Effect 10
		168---183	Effect 11
		184----199	Effect 12
		200----215	Effect 13
		216---231	Effect 14
232----255	Effect 15		
CH18	Effect speed	0----255	From fast to slow
CH19	Reset	241----250	Reset after 5s

Pls read it carefully before use it

Importer name: FISHING KING, SLU

Importer address: PIEDRABUENA, 4, 4B, MADRID, MADRID, 28026 Spain

Manufacturer name: Shenzhen TOMTOP Technology Co., Ltd.

Manufacturer address: G-4 Zone 5/F, No.1 Exchange Square, Huanan City, Pinghu Town, Longg District, Shenzhen, Guangdong, China