



**Identification:**

- 1, Hanging bracket
- 2, DMX in
- 3, DMX out
- 4, Dipswitches
- 5, Power supply
- 6, Fuse
- 7, Microphone
- 8, Sound sensitivity control
- 9, Cooling fan

**Bottom**

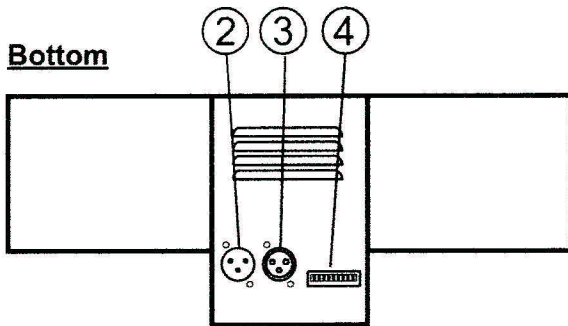

**Side**

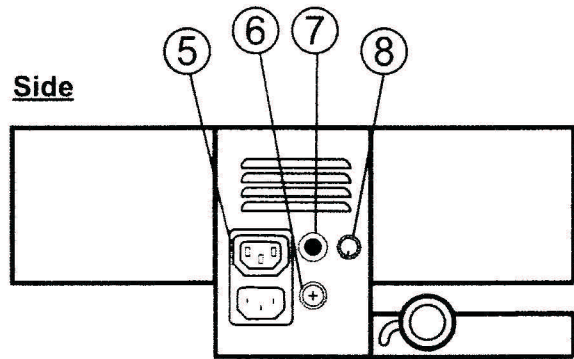

**DMX Function Chart**

Channel	Value	Function
1	0-255	Tilts top mirror up and down
2	0-255	Tilts bottom right mirror up and down
3	0-255	Tilts bottom left mirror up and down
4	N/A	Not used
5	0-251	Pattern selector, 1 to 15 (top mirror)
	252-255	Blackout (top mirror)
6	0-251	Pattern selector, 1 to 15 (bottom right mirror)
	252-255	Blackout (bottom right mirror)
7	0-251	Pattern selector, 1 to 15 (bottom left mirror)
	252-255	Blackout (bottom left mirror)
8	0-255	Speed control